



A brand of Larsen & Toubro Limited

L&T-SuFin, Larsen & Toubro Limited,

The Metropolitan, 4" Floor, E Block, Bandra - Kurla Complex, Bandra East, Mumbai - 400051, Maharashtra, INDIA Tel: +91 8291 211 421 Email: b2bhelp@larsentoubro.com Registered Office: Larsen & Toubro Limited L&T House, N. M. Marg Ballard Estate Mumbai 400 001. INDIA CIN: L99999MH1946PLC004768





DOUBLE CHARGE

VITRIFIED TILES

FULLBODYVITRIFIED TILES



About Us

L&T-SuFin is an integrated platform for buying and selling of industrial products and services. Backed by L&T - India's leading manufacturing, building & construction company - L&T-SuFin is poised to transform the B2B marketplace. Enabling businesses, especially MSMEs, to source their industrial suppliers pan-India, digitally and cost-effectively.

Being 'integrated' means that with L&T-SuFin you get everything, from a vast selection of products across multiple categories to Financing and Logistics support from carefully vetted Partners. It brings choice and convenience to your doorstep in one completely reliable package.

For Sellers, L&T-SuFin is an opportunity to broaden their markets like never before. The platform is designed to reach out to buyers across categories and pan India geographies and enable businesses by providing them with a complete ecosystem of seller tools, delivery, and negotiations on a single platform.

The platform offers a unique opportunity to finance and offer logistical solutions to support your business with capital. We aim to leverage our core strength with technology, to offer the L&T experience on a digital platform.

The L&T-SuFin Advantage



Discovery

Find KYC verified Suppliers across Pan India



Transaction

Sell and get payments online.



Delivery

Option of Full load & part load delivery to 21,000+ codes.



RFQ

Get qualified leads from



Finance & Loan



How It Works





Get Registered

Provide Basic KYC details Choose your business category



Showcase

your product



Earn


Get payment in your account Avail business loans at competitive price

Beyond The Surface

A revolutionary material that is uniform, compact, unbreakable, secure, and environmentally friendly. Fragments of minerals arranged in a naturally random pattern and create fantastic surfaces that give bold colour statement to spaces.





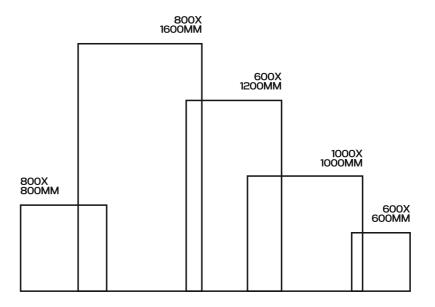

FEATURES & APPLICATION

Bring out the natural elegance of your space with the exquisite designs of the surfaces.



UV & HEAT RESISTANT



STAIN RESISTANT



BREAK RESISTANCE



ABRASION RESISTANCE



SCRATCH RESISTANT

CHEMICAL RESISTANT



FROST RESISTANT



EASY TO INSTALL



HOTELS RESORT



HOUSING BUILDING



BAR AND RESTAURANTS



SHOPS AND OFFICE



PUBLIC SPACES



AIRPORTS INDOOR



MALLS ARCADE



TRAIN STATIONS

FEATURES



















INTRODUCING

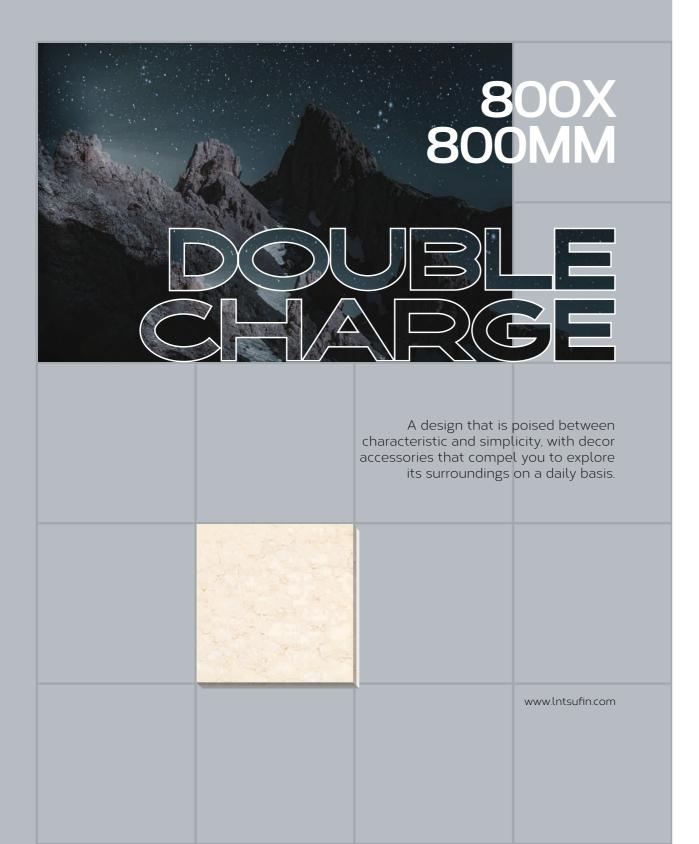

















WINTER WHITE PEARL WHITE

MILKY WHITE

MOON WHITE

ENDLESS WHITE HIMALAYAN PINK
















SPECKLED GOLD DIAMOND GRAY

FOSSIL GRAY

UMBER BROWN

UNDULATING TERRAIN BROWN

STONE GRAY














IRON ORE BLACK MAHOGANY RED CARRARA WHITE ELEGANT BROWN FOSSIL BLACK

FOSSIL MAROON















RIHNO GRAY

STONY WHITE

ALMOND BROWN ICE WHITE

BEACH BROWN

DIAMOND WHITE















DIAMOND BLACK COARSE GOLD

COARSE SLATE

COARSE GREY

MAGICAL CREMA CALLISTO CREMA







CRUDE SLATE












WINTER WHITE

PEARL WHITE








ENDLESS WHITE

MILKY WHITE

MOON WHITE

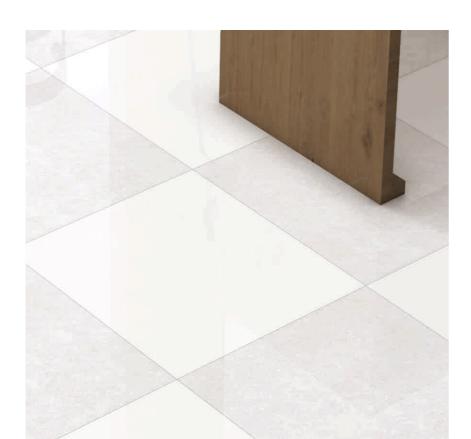














HIMALAYAN PINK



SPECKLED GOLD

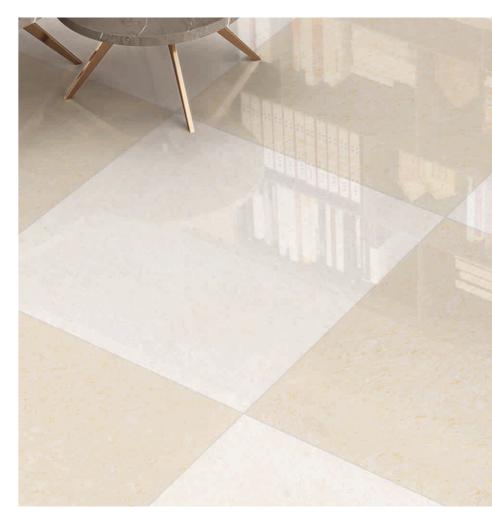



800×800MM






DIAMOND GRAY




FOSSIL GRAY



UMBER BROWN

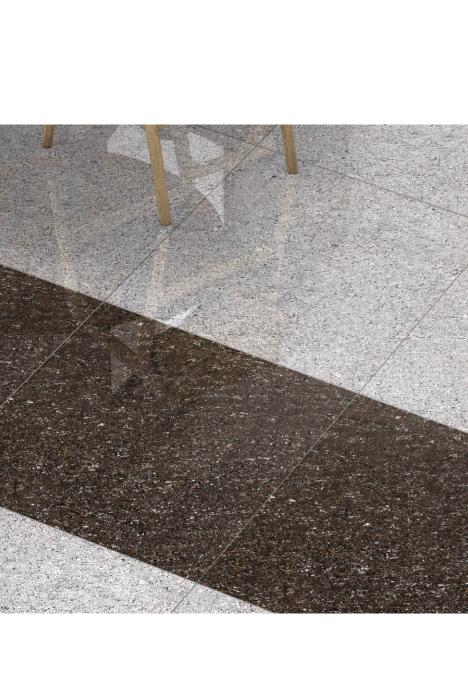



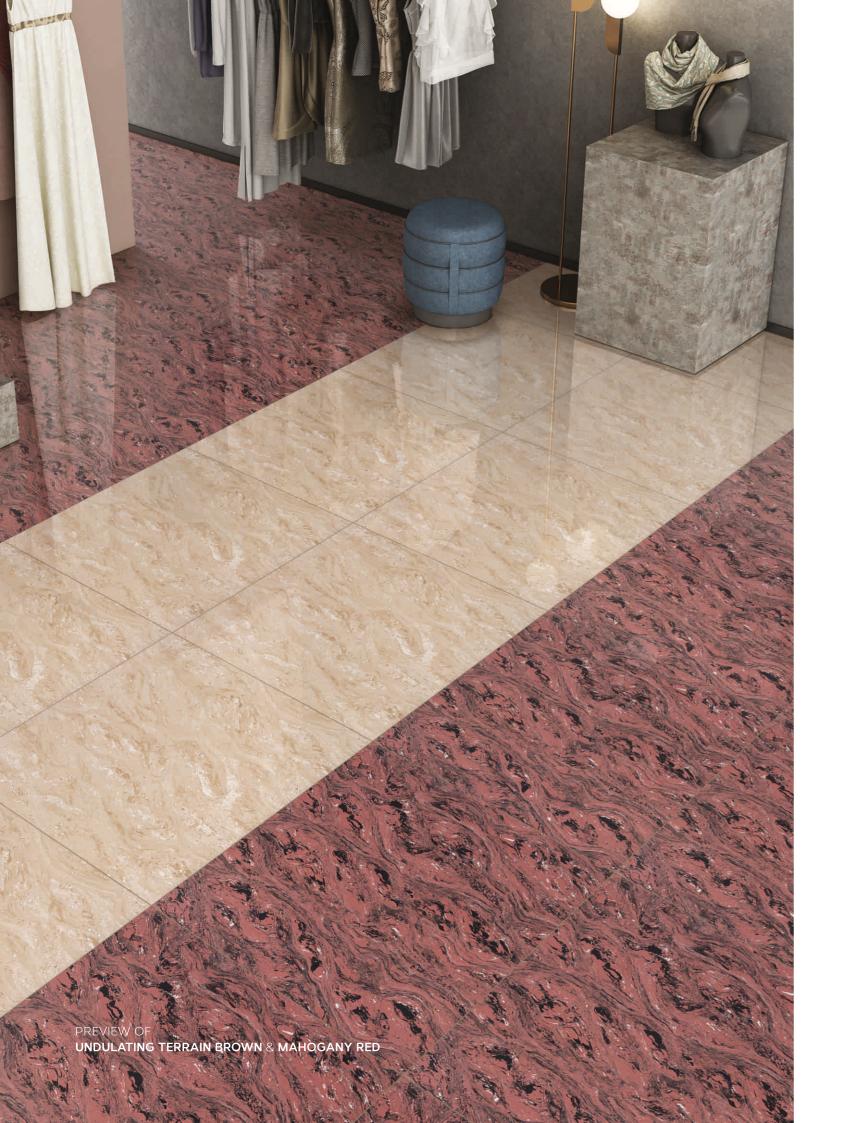














MAHOGANY RED



STONE GRAY



IRON ORE BLACK





800×800MM








CARRARA WHITE

ELEGANT BROWN







FOSSIL MAROON

RIHNO GRAY

FOSSIL BLACK

















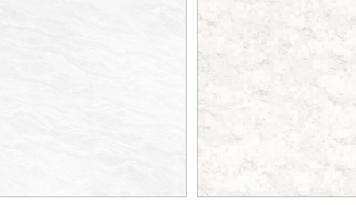

ICE WHITE

STONY WHITE











13 | 14 www.lntsufin.com



800X800MM





DIAMOND WHITE



DIAMOND BLACK








| | Technical Specifica | tion 800x800mm [| Double Charge | |
|---------|-----------------------------------|--|----------------------|-------------|
| S.No. | Characteristics | Vitrified tiles 15622/2013 Group B1a | Our Value | Test Method |
| Dimens | sions & Surface Quality | | | |
| 1 | Deviation in length and width | ± 0.1% | 0.10% | IS 13630-1 |
| 2 | Deviation in thickness | ± 5% | 3.50% | IS 13630-1 |
| 3 | Deviation in Staightness of sides | ± 0.1% | 0.10% | IS 13630-1 |
| 4 | Deviation in Rectangualrity | ± 0.1% | 0.10% | IS 13630-1 |
| 5 | Deviation in Surface Flatness | ± 0.5% | 0.20% | IS 13630-1 |
| 6 | Surface Quality | 95% of the tiles free from visible defect | 95% | IS 13630-1 |
| Physica | al Properties | | | · |
| 1 | Water absorption | <0.08% | 0.05% | IS 13630-2 |
| 2 | Flexural modulus or rupture | 35 N/MM ² | 40 N/MM ² | IS 13630-6 |
| 3 | Breaking Strength | >1300 N | >1700 N | IS 13630-6 |
| 4 | Moisture expansion | 0.02% | Nil | IS 13630-3 |
| 5 | Moh's hardness | Min-5 | Min-5 | IS 13630-1 |
| 6 | Surface Abrasion | Max 140 mm ³ | 120 mm ³ | IS 13630-11 |
| 7 | Frost resistance | No Damage | No Damage | IS 13630-1 |
| 8 | Bulk Density | >2.2gm/cc | 2.3 gm/cc | IS 13630-2 |
| 9 | Glossiness | As per Mfg. Norms. | >85% | Glossmete |
| 10 | Impact Resistance | 0.55MIN | 0.55 MIN | IS 13630-1 |
| Chemic | cal characteristics | ' | | |
| 1 | Stain Resistance | Class I Min. | Class II | IS 13630-8 |
| 2 | Chemical Resistance | Class AA Min. | Class AA | IS 13630-8 |
| 3 | Acid Resistance | Resistance | Resistance | IS 13630-8 |

| PACKING DETAILS | | | | | |
|------------------|-----------------|-----------|-------------------|----------------|--|
| Dimensions (mm) | Thickness | Tiles/Box | Coverage Area/Box | Weight | |
| 1000x1000mm | 11.5mm (Approx) | 2Pcs. | 21.52 Sq. Ft. | 50 Kg (Approx) | |
| 800x800mm | 9.5mm (Approx) | 3Pcs. | 20.68 Sq. Ft. | 40 Kg (Approx) | |

Note: Certain amount of size and shade variation is inherent in all ceramic products. Our conformity to the above fast is applicable only for quality. Colour shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However the company reserve the right to change the specification without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. It is suggest to check the tiles before purchase any laying as the company does not accect responsibility once the tiles are laid.

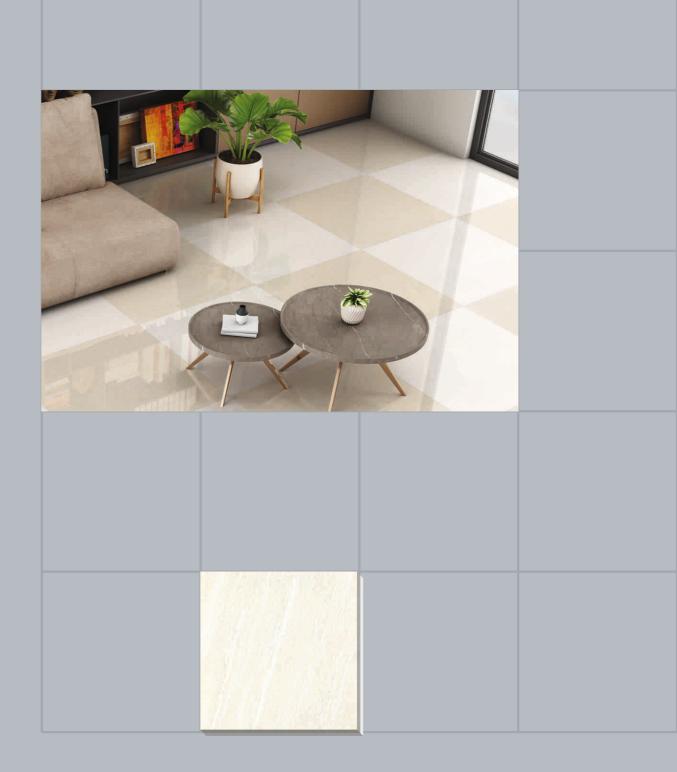

If you're looking for a natural look tile, then the 800x800mm tiles are an ideal option with an awesome tile patterns that gives your space a classic and timeless look.













COARSE GOLD



COARSE SLATE



COARSE GREY



MAGICAL CREMA



CALLISTO CREMA



CRUDE GREY



CRUDE SLATE




DOUBLE CHARGE VITRIFIED TILES TECHNICAL SPECIFICATIONS

| | SOUBLE GHANGE WINNIED HELD TECHNICAL SPECIFICATIONS | | | | | | |
|----|---|---|--------------------------|-------------------|--|--|--|
| NO | TECHNICAL DETAILS | International STD. ISO 13006/EN 176. B1A | VALUES | METHOD OF TESTING | | | |
| 1 | Deviation In Length & Width | ±0.6% | ±0.1% | ISO 10545-2 | | | |
| 2 | Deviation In Thickness | ±5% | ±2% | ISO 10545-2 | | | |
| 3 | Straightness Of Sides | ±0.5% | ±0.1% | ISO 10545-2 | | | |
| 4 | Rectangularity | ±0.6% | ±0.1% | ISO 10545-2 | | | |
| 5 | Surface Flatness | ±0.5% | ±0.1% | ISO 10545-2 | | | |
| 6 | Hardness On Mohs Scale | >6 | >6 | EN 101 | | | |
| 7 | Water Absorption | < 0.5% | <0.05% | ISO 10545-3 | | | |
| 8 | Flexural Strength(Mor) | > 35 N/mm² | > 40 N/mm² | ISO 10545-4 | | | |
| 9 | Abrasion Resistance | < 175 mm³ | <145 mm³ | ISO 10545-6 | | | |
| 10 | Skid Resistance | > 0.4 | > 0.6 | ISO 10545-17 | | | |
| 11 | Bulk Density | >2 | > 2.2 | DIN 51082 | | | |
| 12 | Frost Resistance | Frost Proof | Frost Proof | ISO 10545-12 | | | |
| 13 | Chemical Resistance | No Damage | No Damage | ISO 10545-13 | | | |
| 14 | Thermal Shock | No Damage | No Damage | ISO 10545-9 | | | |
| 15 | Thermal Expansion | < 9 X 10 ⁽⁻⁶⁾ | < 6 X 10 ⁽⁻⁶⁾ | ISO 10545-8 | | | |
| 16 | Stain Resistance | Resistant | Resistant | ISO 10545-14 | | | |
| 17 | Moisture Expansion | Nil | Nil | ISO 10545-10 | | | |
| 18 | Glossiness | Gloss Meter | Min 90% Reflection | ISO 10545-2 | | | |
| 19 | Breaking Strength | 1113 N | 2800 N | ISO 10545-4 | | | |

| PACKING DETAILS | | | | | |
|------------------|-----------------|-----------|-------------------|----------------|--|
| Dimensions (mm) | Thickness | Tiles/Box | Coverage Area/Box | Weight | |
| 1000x1000mm | 11.5mm (Approx) | 2Pcs. | 21.52 Sq. Ft. | 50 Kg (Approx) | |
| 800x800mm | 9.5mm (Approx) | 3Pcs. | 20.68 Sq. Ft. | 40 Kg (Approx) | |

Note: Certain amount of size and shade variation is inherent in all ceramic products. Our conformity to the above fast is applicable only for quality. Colour shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However the company reserve the right to change the specification without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. It is suggest to check the tiles before purchase any laying as the company does not accect responsibility once the tiles are laid.

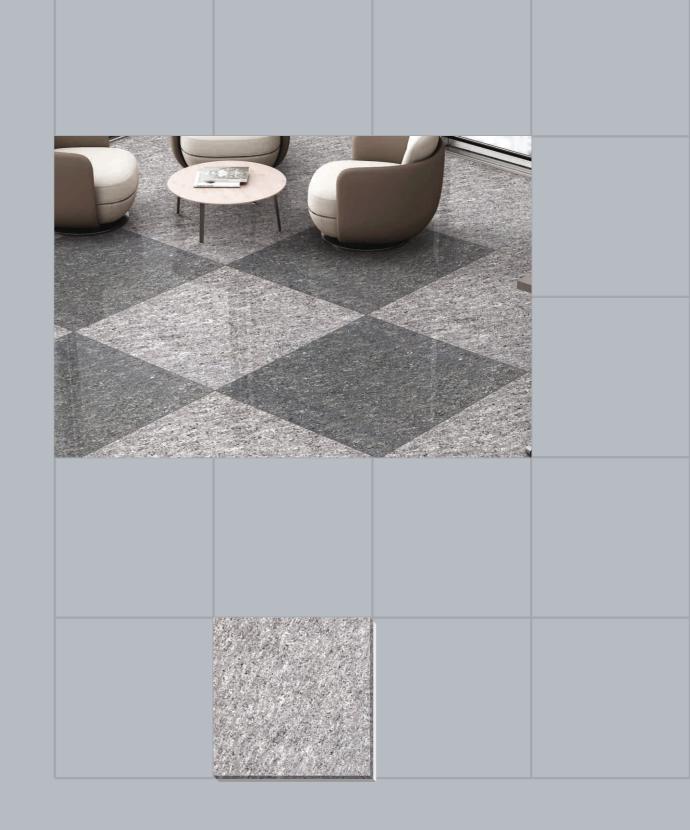

If you're looking for a natural look tile, then the 800x800mm tiles are an ideal option with an awesome tile patterns that gives your space a classic and timeless look.







FEATURES


















A blend of elegance with décor objects that recreates a continuous sense of movement and dynamism.



1000×1000MM



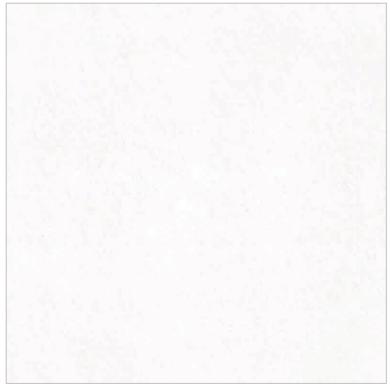

MARBLE WHITE





POLAR WHITE

25 | 26





SPECKLED CREMA












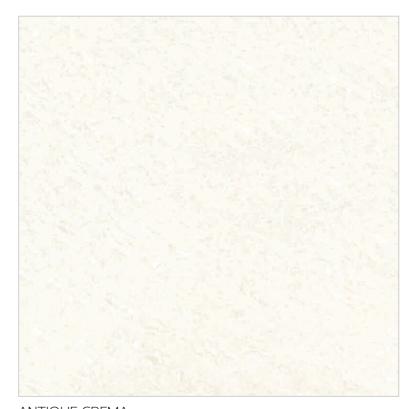

ANTIQUE CREMA



SUNSET CREMA



MISTY WHITE

27 | 28 www.lntsufin.com



1000×1000MM






PLATINUM WHITE



ONYX CREMA 29 | 30

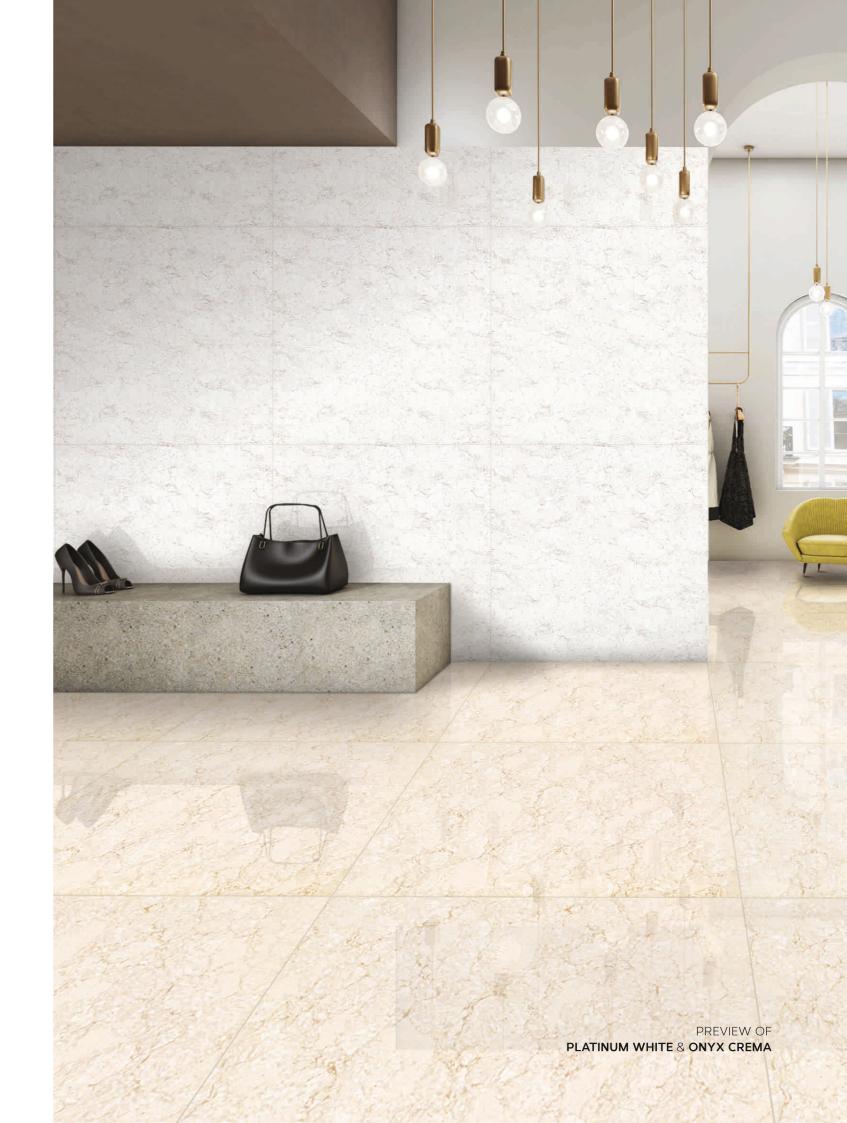











RIVER WHITE



RIVER CREMA

31 | 32 www.lntsufin.com





1000×1000MM





ALASKA WHITE





DALGONA CREMA

33 | 34






| Technical Specification 1000x1000mm Double Charge | | | | | |
|---|-----------------------------------|--|----------------------|-------------|--|
| S.No. | Characteristics | Vitrified tiles 15622/2013 / Group B1a | Our Value | Test Method | |
| Dimens | sions & Surface Quality | | | · | |
| 1 | Deviation in length and width | ± 0.1% | 0.10% | IS 13630-1 | |
| 2 | Deviation in thickness | ± 5% | 3.50% | IS 13630-1 | |
| 3 | Deviation in Staightness of sides | ± 0.1% | 0.10% | IS 13630-1 | |
| 4 | Deviation in Rectangualrity | ± 0.1% | 0.10% | IS 13630-1 | |
| 5 | Deviation in Surface Flatness | ± 0.5% | 0.20% | IS 13630-1 | |
| 6 | Surface Quality | 95% of the tiles free from visible defect | 95% | IS 13630-1 | |
| Physica | al Properties | | | · | |
| 1 | Water absorption | <0.08% | 0.05% | IS 13630-2 | |
| 2 | Flexural modulus or rupture | 35 N/MM ² | 40 N/MM ² | IS 13630-6 | |
| 3 | Breaking Strength | >1300 N | >1700 N | IS 13630-6 | |
| 4 | Moisture expansion | 0.02% | Nil | IS 13630-3 | |
| 5 | Moh's hardness | Min-5 | Min-5 | IS 13630-13 | |
| 6 | Surface Abrasion | Max 140 mm ³ | 120 mm ³ | IS 13630-11 | |
| 7 | Frost resistance | No Damage | No Damage | IS 13630-10 | |
| 8 | Bulk Density | >2.2gm/cc | 2.3 gm/cc | IS 13630-2 | |
| 9 | Glossiness | As per Mfg. Norms. | >85% | Glossmete | |
| 10 | Impact Resistance | 0.55MIN | 0.55 MIN | IS 13630-1 | |
| Chemic | cal characteristics | | | | |
| 1 | Stain Resistance | Class I Min. | Class II | IS 13630-8 | |
| 2 | Chemical Resistance | Class AA Min. | Class AA | IS 13630-8 | |
| 3 | Acid Resistance | Resistance | Resistance | IS 13630-8 | |


| PACKING DETAILS | | | | | |
|------------------|-----------------|-----------|-------------------|----------------|--|
| Dimensions (mm) | Thickness | Tiles/Box | Coverage Area/Box | Weight | |
| 1000x1000mm | 11.5mm (Approx) | 2Pcs. | 21.52 Sq. Ft. | 50 Kg (Approx) | |
| 800x800mm | 9.5mm (Approx) | 3Pcs. | 20.68 Sq. Ft. | 40 Kg (Approx) | |

Note: Certain amount of size and shade variation is inherent in all ceramic products. Our conformity to the above fast is applicable only for quality. Colour shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However the company reserve the right to change the specification without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. It is suggest to check the tiles before purchase any laying as the company does not accect responsibility once the tiles are laid.

Charismatic tiles of 1000 x1000mm pay attention to conciseness and generosity and reveal the sense of luxury in a low-key way.

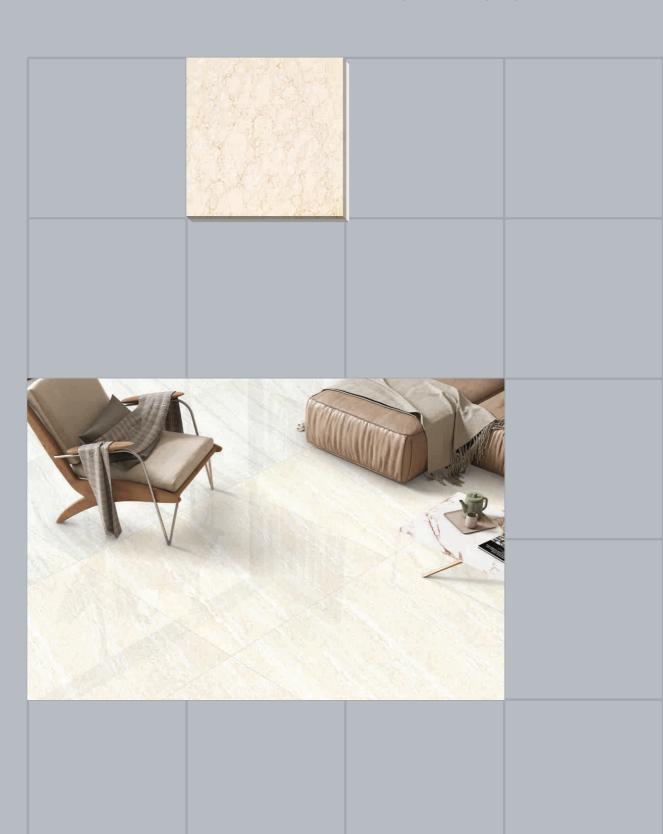

INTRODUCING

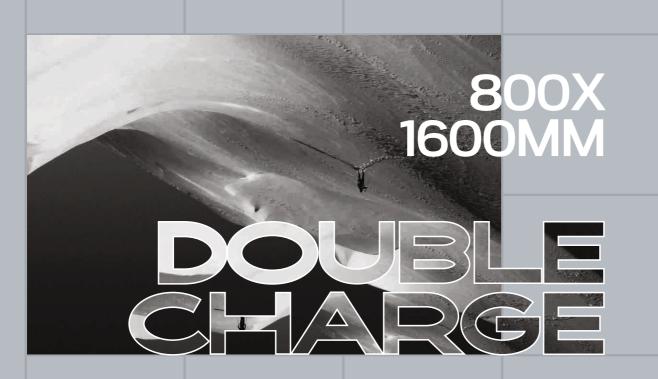

Elegant and peaceful design that perfectly gives natural environment to drive positive vibes in every corner of the home.



FEATURES















www.lntsufin.com





















BISCUIT BROWN DEWY GRAY

QUARRY GRAY

VOLCANIC RED













EARTH BROWN

JUTE WHITE

EARTH BLACK

TITANIUM WHITE CLASSIC WHITE FROSTY WHITE MOON CREMA











CLOUDY WHITE CLOUDY CREMA



800X**1600**MM








BISCUIT BROWN





DEWY GRAY

39 | 40

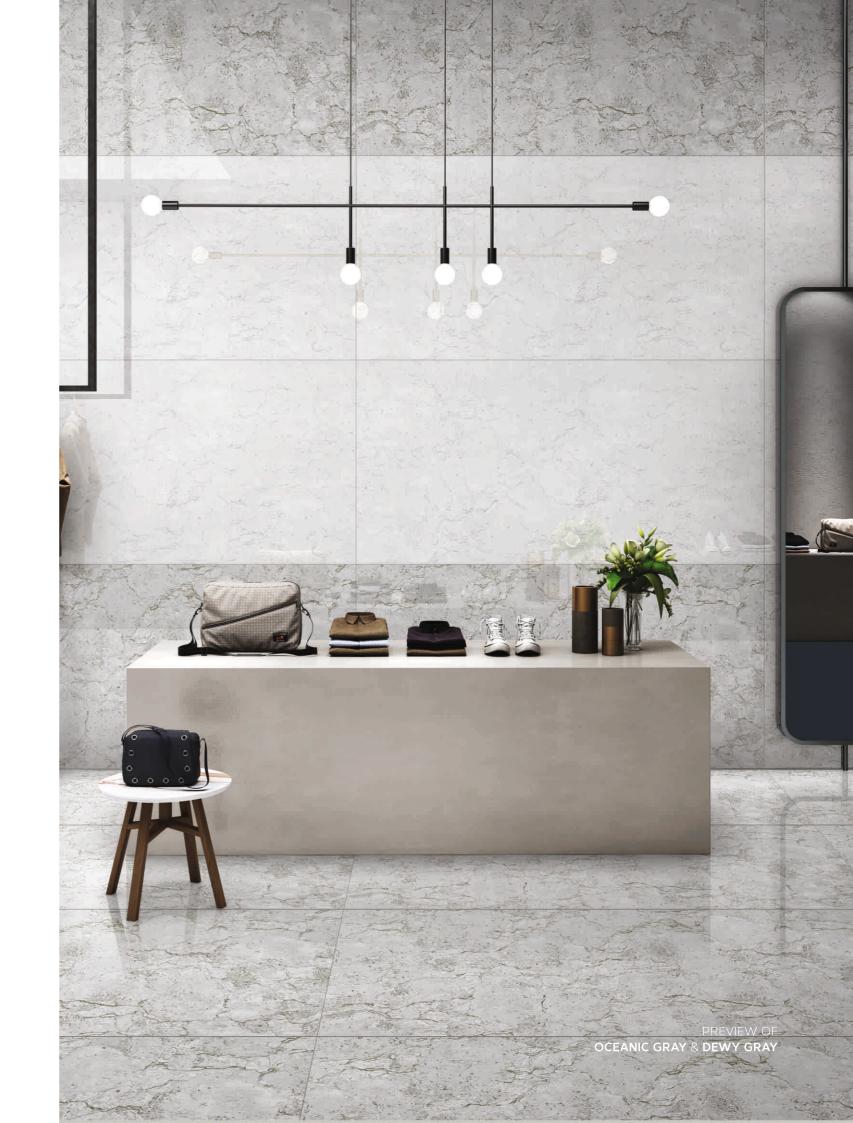











QUARRY GRAY

VOLCANIC RED



EARTH BROWN

EARTH BLACK

41 | 42 www.lntsufin.com





800X**1600**MM








CLASSIC WHITE




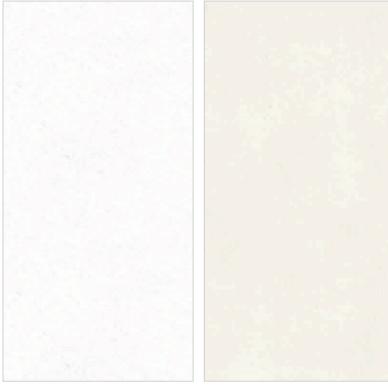

FROSTY WHITE

MOON CREMA

43 | 44

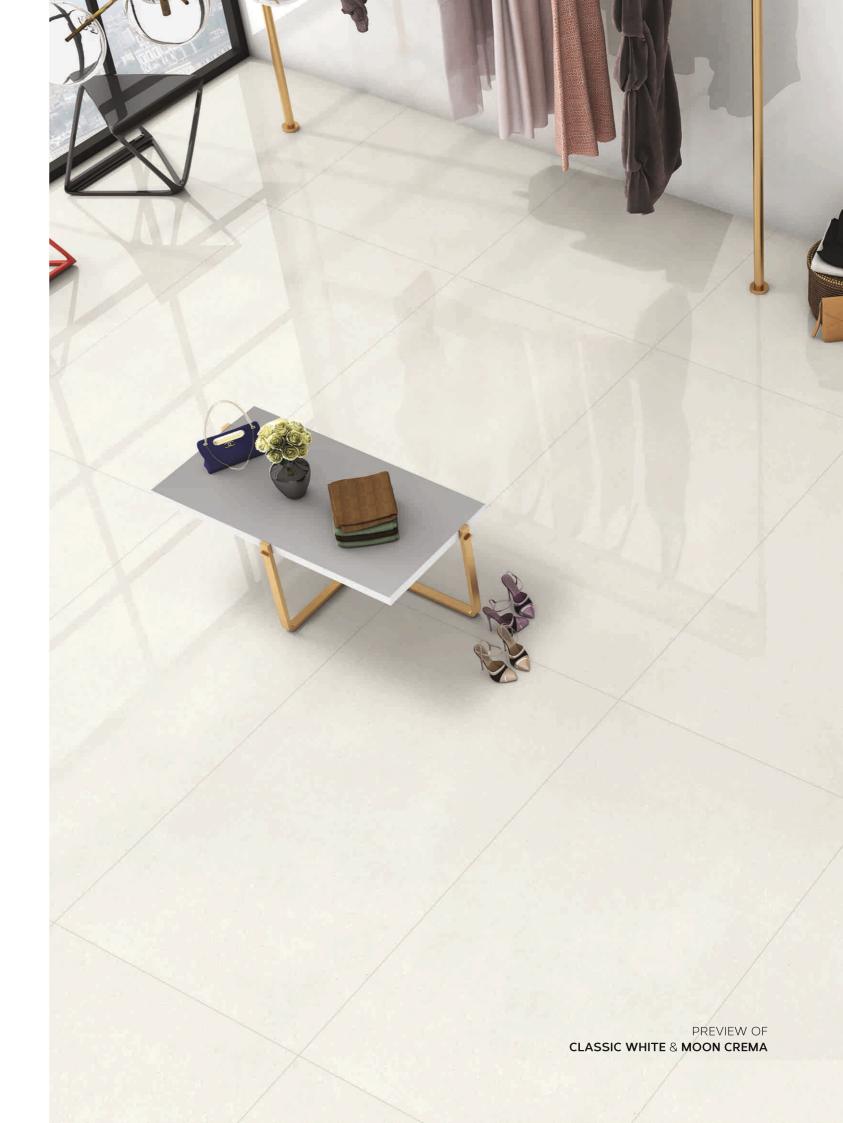











JUTE WHITE

JUTE CREMA



CLOUDY WHITE

CLOUDY CREMA

45 | 46 www.lntsufin.com





| | rechinical Specificati | ion 800x1600mm [| Jouble Charge | |
|---------|------------------------------------|-----------------------------|--------------------------|-------------|
| S.No. | Characteristics | Group Bla IS :15622:2013 | Our Value | Test Metho |
| Regula | tory Properties | | | |
| 1 | Deviation in length and width | ± 0.5% | ± 0.1% | IS 13630-1 |
| 2 | Deviation in thickness | ± 5% | ± 2% | IS 13630-1 |
| 3 | Deviation in Staightness of sides | ± 0.5% | ± 0.1% | IS 13630-1 |
| 4 | Deviation in Rectangualrity | ± 0.5% | ± 0.1% | IS 13630-1 |
| 5 | Deviation in Surface Flatness | ± 0.5% | ± 0.2% | IS 13630-1 |
| 6 | Colour difference | Unaltered | No change | IS 13630-1 |
| 7 | Glossiness | As per manufacture | Minimum 70% | Glossy met |
| Structu | ıral Properties | | | |
| 1 | Apparent density | >2.0gm/cc | >2.28gm/cc | IS 13630-2 |
| 2 | Water absorption | <0.5% | <0.05% | IS 13630-2 |
| Massive | Mechanical charactersitics | | | |
| 1 | Flexural modulus or rupture | Min 35 N/mm ² | Min 40 N/mm ² | IS 13630-2 |
| 2 | Breaking Strength | Min 1300N | Min. 2000 N | IS 13630-2 |
| 3 | Impact resistance | As per manufacture | Min 0.55 | IS 13630-14 |
| Surface | Mechanical charactersitics | | | |
| 1 | Deep abrasion resistance | Max 175 mm ³ | Max 132 mm ³ | IS 13630-6 |
| 2 | Moh's hardness | Min 6 | 8 ⁺ | IS 13630-13 |
| Thermo | phydrometric charactersitics | | | · |
| 1 | Frost resistance | No Damage | Frost Proof | IS 13630-10 |
| 2 | Moisture expansion | Nil | Nil | IS 13630-3 |
| Chemic | al characteristics charactersition | :s | | |
| 1 | Stain Resistance | Resistance | Resistance | IS 13630-8 |
| 2 | Chemical Resistance | No Damage | No Damage | IS 13630-8 |


| PACKING DETAILS | | | | | | |
|------------------|----------------|-----------|-------------------|----------------|--|--|
| Dimensions (mm) | Thickness | Tiles/Box | Coverage Area/Box | Weight | | |
| 800x1600 | 9.5mm (Approx) | 2Pcs. | 27.55 Sq. Ft. | 52 Kg (Approx) | | |

Note: Certain amount of size and shade variation is inherent in all ceramic products. Our conformity to the above fast is applicable only for quality. Colour shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However the company reserve the right to change the specification without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. It is suggest to check the tiles before purchase any laying as the company does not accect responsibility once the tiles are laid.

800x1600mm provide an elegant and luxurious touch to any spaces, these tiles are made with high-quality materials that are both durable and attractive.





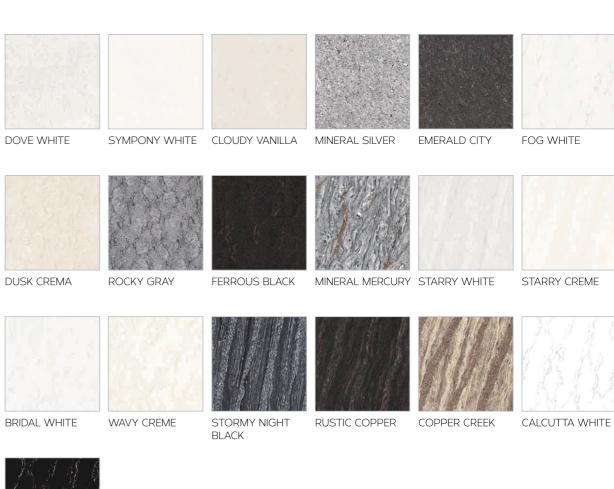









1200×**600**MM











SYMPONY WHITE

DOVE WHITE















MINERAL SILVER

EMERALD CITY



53 | 54



1200×**600**MM











FOG WHITE

DUSK CREMA

ROCKY GRAY















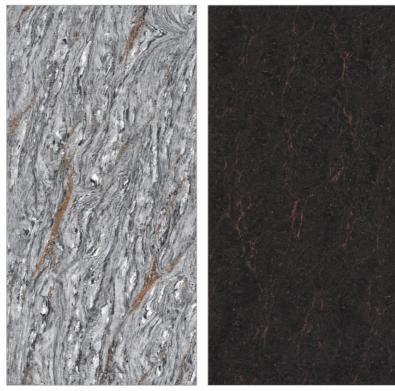

MINERAL MERCURY

FERROUS BLACK

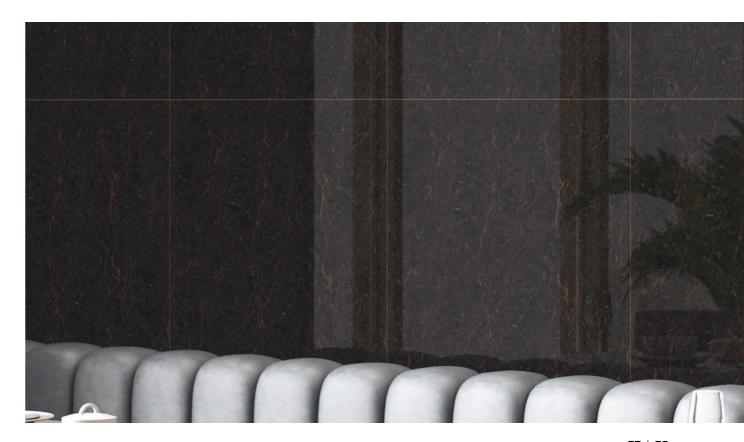

www.lntsufin.com



1200×**600**MM









STARRY CREME



BRIDAL WHITE



59 | 60



















STORMY NIGHT BLACK

RUSTIC COPPER

COPPER CREEK


61 | 62 www.lntsufin.com





1200×**600**MM



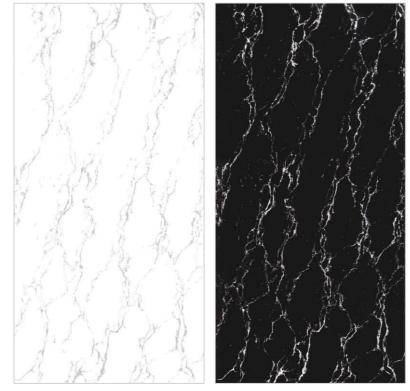



CALCUTTA BLACK



63 | 64 www.lntsufin.com






| | Technical Specificat | ion (1200x600mn | n Double Charge |) |
|---------|-----------------------------------|-----------------------------|--------------------------|-------------|
| S.No. | Characteristics | Group Bla IS :15622:2013 | Our Value | Test Metho |
| Regula | tory Properties | | | |
| 1 | Deviation in length and width | ± 0.5% | ± 0.1% | IS 13630-1 |
| 2 | Deviation in thickness | ± 5% | ± 2% | IS 13630-1 |
| 3 | Deviation in Staightness of sides | ± 0.5% | ± 0.1% | IS 13630-1 |
| 4 | Deviation in Rectangualrity | ± 0.5% | ± 0.1% | IS 13630-1 |
| 5 | Deviation in Surface Flatness | ± 0.5% | ± 0.2% | IS 13630-1 |
| 6 | Colour difference | Unaltered | No change | IS 13630-1 |
| 7 | Glossiness | As per manufacture | Minimum 70% | Glossy Mete |
| Structu | ıral Properties | | · | |
| 1 | Apparent density | >2.0gm/cc | >2.28gm/cc | IS 13630-2 |
| 2 | Water absorption | <0.5% | <0.05% | IS 13630-2 |
| Massive | e Mechanical characteristics | | | |
| 1 | Flexural modulus or rupture | Min 35 N/mm ² | Min 40 N/mm ² | IS 13630-2 |
| 2 | Breaking Strength | Min 1300N | Min. 2000 N | IS 13630-2 |
| 3 | Impact resistance | As per manufacture | Min 0.55 | IS 13630-14 |
| Surface | Mechanical characteristics | | | |
| 1 | Deep abrasion resistance | Max 175 mm ³ | Max 132 mm ³ | IS 13630-6 |
| 2 | Moh's hardness | Min 6 | 8 ⁺ | IS 13630-13 |
| Thermo | phydrometric characteristics | ' | ' | ' |
| 1 | Frost resistance | No Damage | Frost Proof | IS 13630-10 |
| 2 | Moisture expansion | Nil | Nil | IS 13630-3 |
| Chemic | al characteristics characteristic | is . | | |
| 1 | Stain Resistance | Resistance | Resistance | IS 13630-8 |
| 2 | Chemical Resistance | No Damage | No Damage | IS 13630-8 |

| | PACKING DETAILS | | | | | |
|------------------|-----------------|-----------|-------------------|--------------|--|--|
| Dimensions (mm) | Thickness | Tiles/Box | Coverage Area/Box | Weight | | |
| 600x1200mm | 9mm Approx | 2 pcs. | 15.5 sq. ft | 29 kg Approx | | |

Note: Certain amount of size and shade variation is inherent in all ceramic products. Our conformity to the above fast is applicable only for quality. Colour shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However the company reserve the right to change the specification without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. It is suggest to check the tiles before purchase any laying as the company does not accect responsibility once the tiles are laid.

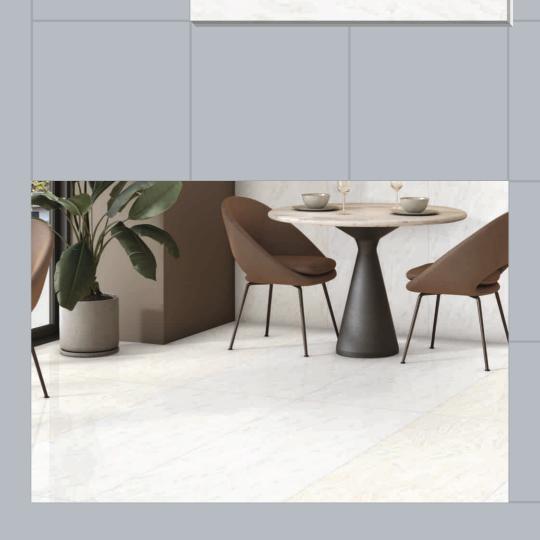

600x1200mm double charge tiles give your home a beautiful look and guess what they have an immense amount of durability.



FEATURES




















The most appealing and well-liked designs in the modern interior design field. A series that has become a symbol of interior walls that quickly capture attention and elevate every interior wall to the level of living in a dream world.

GLOSSY FINISH













AQUA GRAY

MIDNIGHT GRAY SNOW WHITE

NIGHT BLACK

OPALINE GREEN













STATIC GRAY

STAGNANT BROWN

SPACE BLACK

GRAINY BROWN CRUDE GRAY

COARSE WHITE













SWARM WHITE SWARM BLACK

MATT FINISH






AQUA GRAY





MIDNIGHT GRAY SNOW WHITE







NIGHT BLACK RUGGED OLIVE



STATIC BLACK

RAW GRAY

WOOD MOSS GRAY









SANDY DARK COSMOS BLACK GRAINY CREMA COSMIC GRAY BROWN











www.lntsufin.com

FLINT GRAY

CORAL CREAM

MILLET BROWN STARRY NIGHT

GRANULAR GRAY




600X**1200**MM









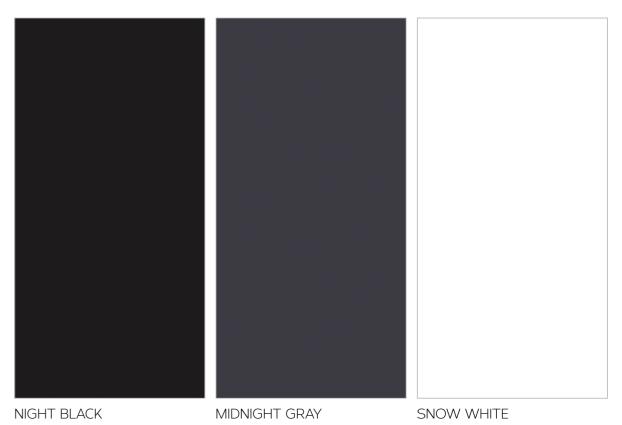










FINISH. MATT



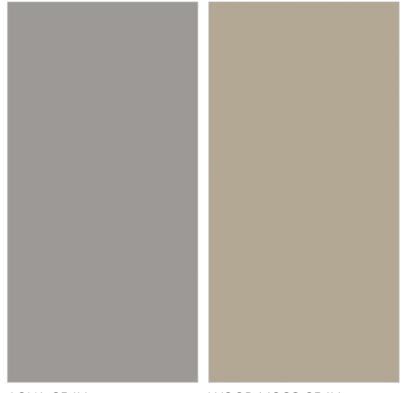

AQUA GRAY WOOD MOSS GRAY



600X**1200**MM








STATIC GRAY



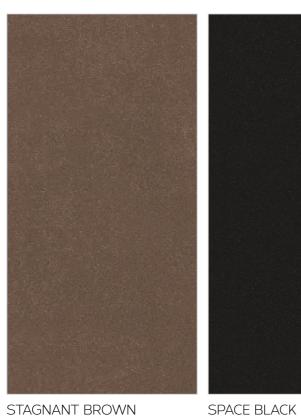

73 | 74

www.lntsufin.com













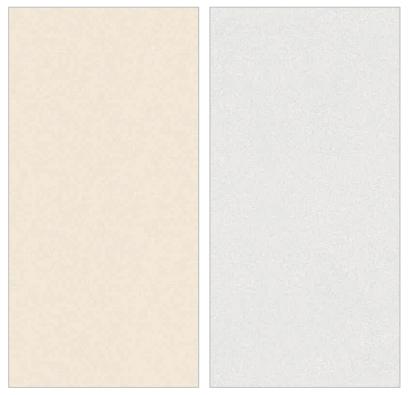

GRAINY BROWN

CRUDE GRAY

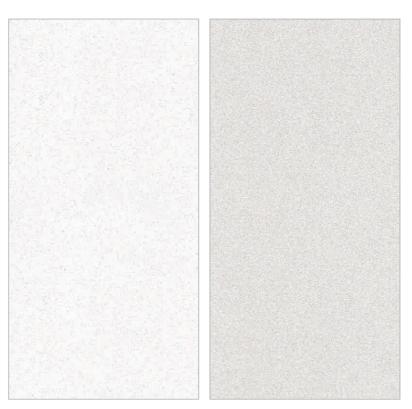

COARSE WHITE

HARSH GRAY

75 | 76 www.lntsufin.com





FINISH. MATT

600X**1200**MM






RUGGED OLIVE

STATIC BLACK



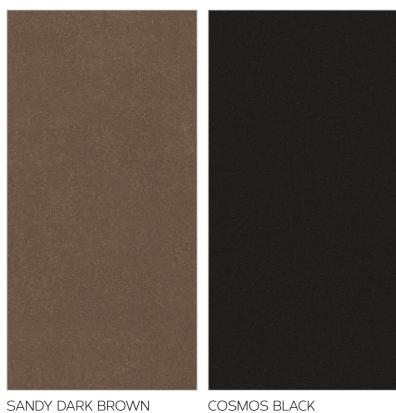

SANDY DARK BROWN

77 | 78

www.lntsufin.com















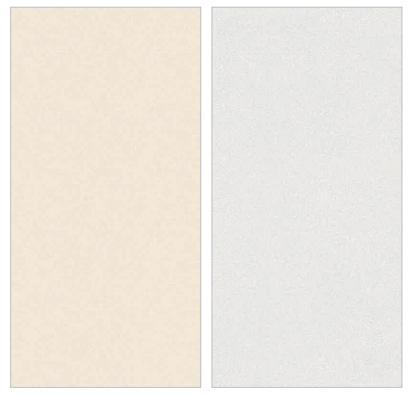

GRAINY CREMA


COSMIC GRAY

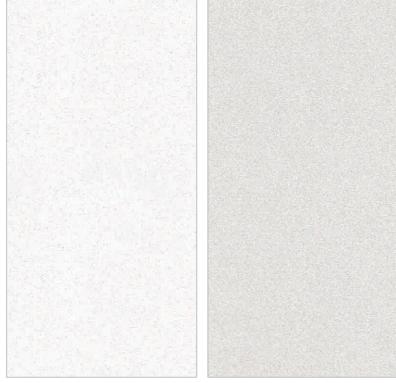

COSMIC WHITE

RAW GRAY

79 | 80 www.lntsufin.com

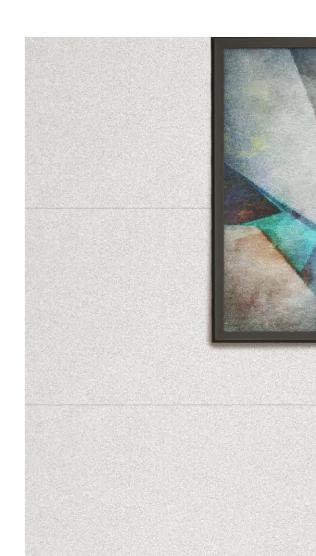




600X**1200**MM


9.5MM THICKNESS







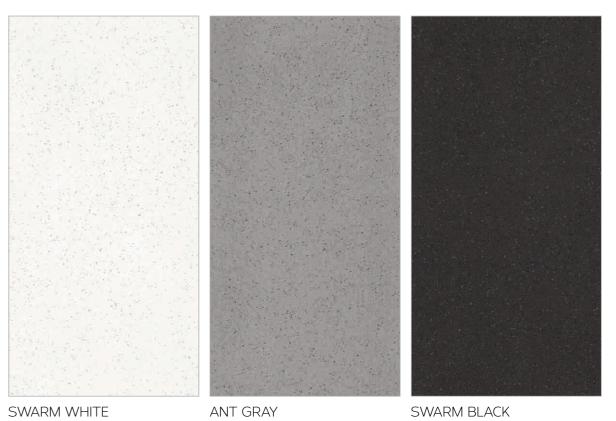

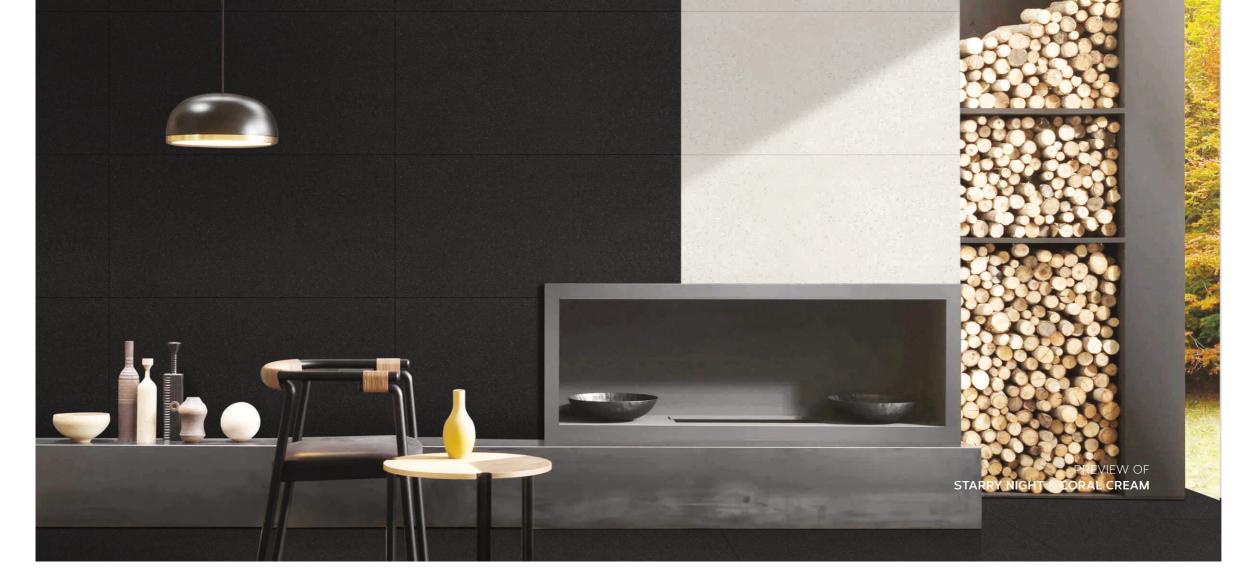




600X**1200**MM



FINISH. **MATT**

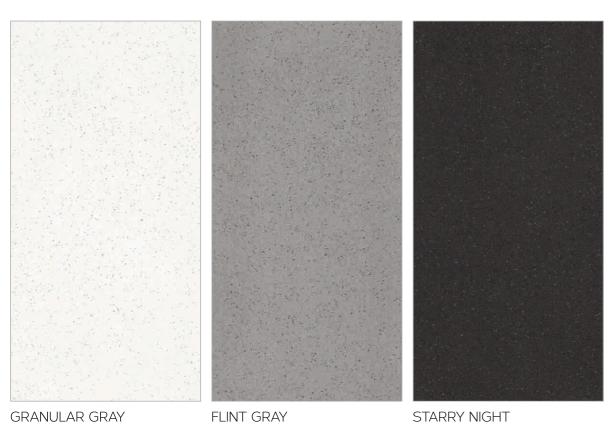






| | rechineat Specific | ation 600x1200mr | ii i att boay | |
|---------|-------------------------------------|-----------------------------------|--------------------------|-------------|
| S.No. | Characteristics | Group BLA ISO:13006/EN144 / 11 | Our Value | Test Metho |
| Regula | tory Properties | | | |
| 1 | Deviation in length and width | ± 0.5% | ± 0.2% | IS 13630-1 |
| 2 | Deviation in thickness | ± 5% | ± 4% | IS 13630-1 |
| 3 | Deviation in Staightness of sides | ± 0.5% | ± 0.1% | IS 13630-1 |
| 4 | Deviation in Rectangualrity | ± 0.5% | ± 0.2% | IS 13630-1 |
| 5 | Deviation in Surface Flatness | ± 0.5% | ± 0.2% | IS 13630-1 |
| 6 | Colour difference | Unaltered | No change | IS 13630-1 |
| Structu | ıral Properties | | | |
| 1 | Apparent density | >2.0gm/cc | >2.28gm/cc | IS 13630-2 |
| 2 | Water absorption | <0.5% | <0.05% | IS 13630-2 |
| Massiv | e Mechanical charactersitics | | | |
| 1 | Flexural modulus or rupture | Min 35 N/mm ² | Min 45 N/mm ² | IS 13630-2 |
| 2 | Breaking Strength | Min 1300N | Min. 2000 N | IS 13630-2 |
| 3 | Impact resistance | As per manufacture | Min 0.55 | IS 13630-14 |
| Surface | e Mechanical charactersitics | | | |
| 1 | Deep abrasion resistance | Max 175 mm ³ | Max 132 mm ³ | IS 13630-6 |
| 2 | Moh's hardness | Min 6 | 7 | IS 13630-13 |
| Thermo | ohydrometric charactersitics | | | |
| 1 | Frost resistance | No Damage | Frost Proof | IS 13630-10 |
| 2 | Moisture expansion | Nil | Nil | IS 13630-3 |
| Chemic | cal characteristics charactersition | :s | | |
| 1 | Stain Resistance | Resistance | Resistance | IS 13630-8 |
| 2 | Chemical Resistance | No Damage | No Damage | IS 13630-8 |

| PACKING DETAILS | | | | | | |
|------------------|---|-------|--------------|----------------|--|--|
| Dimensions (mm) | Dimensions (mm) Thickness Tiles/Box Coverage Area/Box Weight | | | | | |
| 600x1200(Glossy) | 9.5mm (Approx) | 2Pcs. | 15.5 Sq. Ft. | 28 Kg (Approx) | | |
| 600x1200(Matt) | 10.5mm (Approx) | 2Pcs. | 15.5 Sq. Ft. | 31 Kg (Approx) | | |


Note: Certain amount of size and shade variation is inherent in all ceramic products. Our conformity to the above fast is applicable only for quality. Colour shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However the company reserve the right to change the specification without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. It is suggest to check the tiles before purchase any laying as the company does not accect responsibility once the tiles are laid.

An elegant look of 600×1200mm full body tiles with unique collection that adds aesthetic value to your space.

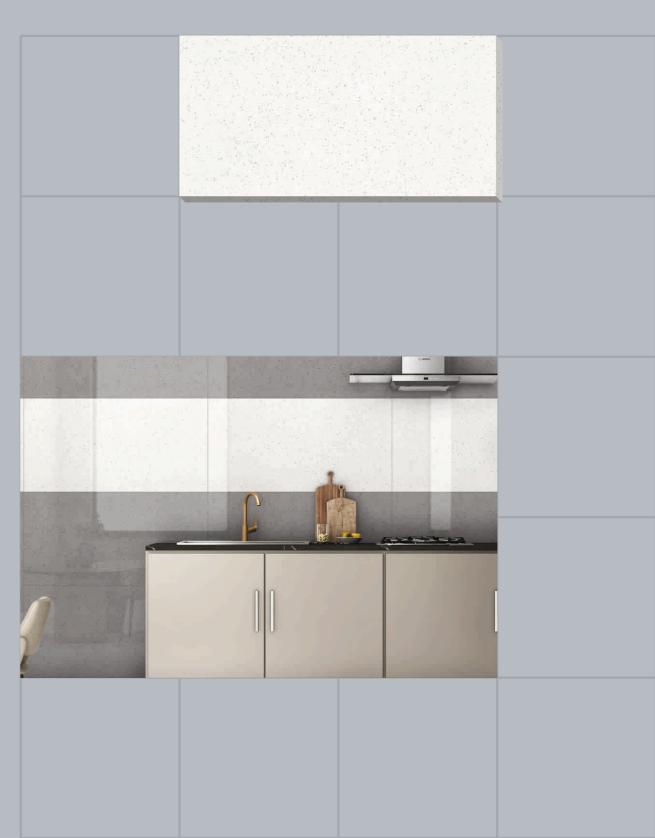





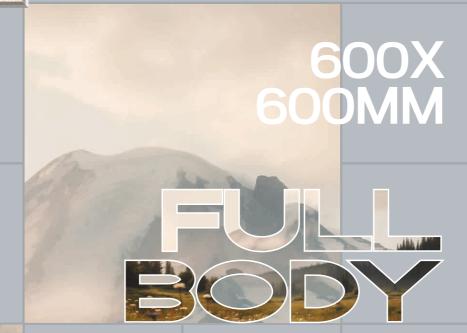

Remarkable versatility, diverse designs, and captivating patterns make them an essential element in interior decoration, adding a touch of sophistication to any room.

www.lntsufin.com

FEATURES




















GALE BEIGE



GALE CAMEL











LUCID LIGHT GREY







LUCID DARK GREY

LUCID KOTA

GALE QUARTZ
















GALE CAMEL



LUCID DARK GREY



GALE QUARTZ






GALE BROWN



GALE GRIS



GALE NERO



LUCID LIGHT GREY






TECHNICAL SPECIFICATIONS


| | ESTITUTE STEER TO ATTORES | | | | | | |
|--------|---|-------------------|---|---------------------|--|--|--|
| Sr. No | Characteristics | Method of Testing | Vitrified Tiles ISO 13006 / EN 176 Group Bla | Values | | | |
| Α | Dimension & Surface Quality | | | | | | |
| 1 | Deviation in Length & Width | ISO 10545-2 | + / - 0.5% | + / - 0.1% | | | |
| 2 | Deviation in Thickness | ISO 10545-2 | + / - 5.0% | + / -2.0% | | | |
| 3 | Straightness of Sides | ISO 10545-2 | + / - 0.5% | + / - 0.1% | | | |
| 4 | Rectangularity | ISO 10545-2 | + / - 0.5 % | + / - 0.1% | | | |
| 5 | Surface Flatness | ISO 10545-2 | + / - 0.5% | + / - 0.2% | | | |
| 6 | Color Differences | ISO 10545-16 | Unaltered | No Change | | | |
| 7 | Surface Coating | Nano Machine | As Per Manfacturer Norms | Nano Polished | | | |
| В | Physical Properties | | | | | | |
| 1 | Water Absorption | ISO 10545-3 | < 0.5% | 0.08% | | | |
| 2 | Flexural Strength (MOR) | ISO 10545-4 | > 27 N / mm2 | > 30 N / mm2 | | | |
| 3 | Mohs Hardness | EN 101 | Min 6 | 6 Mohs | | | |
| 4 | Flexural Breaking Strength | ISO 10545-4 | > 1113 N | 2350 N | | | |
| 5 | Bulk Density (Gm / cc) | DIN 51082 | >2 gm/cc | 2.35 gm/cc | | | |
| 6 | Glossiness | Glossometer | As Per Manfacturer Norms | Min 85 % reflection | | | |
| 7 | Slip Resistance Coefficient of Friction | ISO 10545-17 | > 0.4 | > 0.6 | | | |
| 8 | Crazing Resistance | ISO 10545-11 | Min 4 Cycle @ 7.5 Bar | Passes 4 Cycle | | | |
| 9 | Resistance Of Surface Abrasion | ISO 10545-6 | As Per Manfacturer Norms | > PEI I V | | | |
| С | Chemical Properties | | | | | | |
| 1 | Staining Resistance | ISO 10545-14 | Resistant | Resistant | | | |
| 2 | Household Chemicals | ISO 10545-13 | No Damage | No Damage | | | |
| D | Thermal Properties | | | | | | |
| 1 | Thermal Shock Resistance | ISO 10545-9 | No Damage | No Damage | | | |
| 2 | Thermal Expansion | ISO 10545-10 | 9 x 10 - 6 max | 6 x 10 -6 | | | |
| 3 | Moisture Expansion | ISO 10545 - 10 | Nil | Nil | | | |


| | PACKING DETAILS | | | | | |
|------------------|-----------------|-----------|-------------------|--------------|--|--|
| Dimensions (mm) | Thickness | Tiles/Box | Coverage Area/Box | Weight | | |
| 600x600mm | 8mm Approx | 4 pcs. | 15.5 sq. ft | 25 kg Approx | | |

Note: Certain amount of size and shade variation is inherent in all ceramic products. Our conformity to the above fast is applicable only for quality. Colour shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However the company reserve the right to change the specification without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. It is suggest to check the tiles before purchase any laying as the company does not accect responsibility once the tiles are laid.

Captivating beauty, have the power to transform ordinary spaces into extraordinary works of art which create a visual feast for the eyes

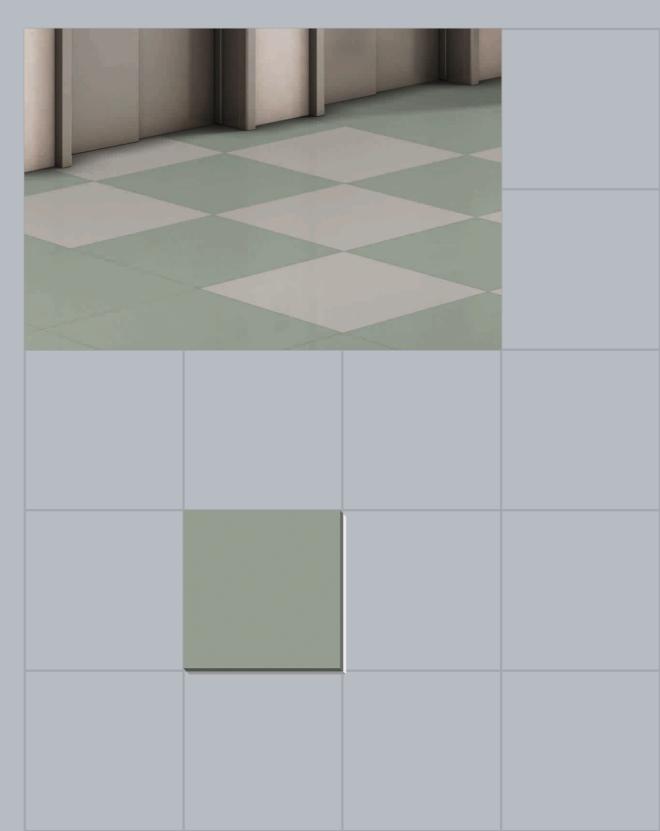

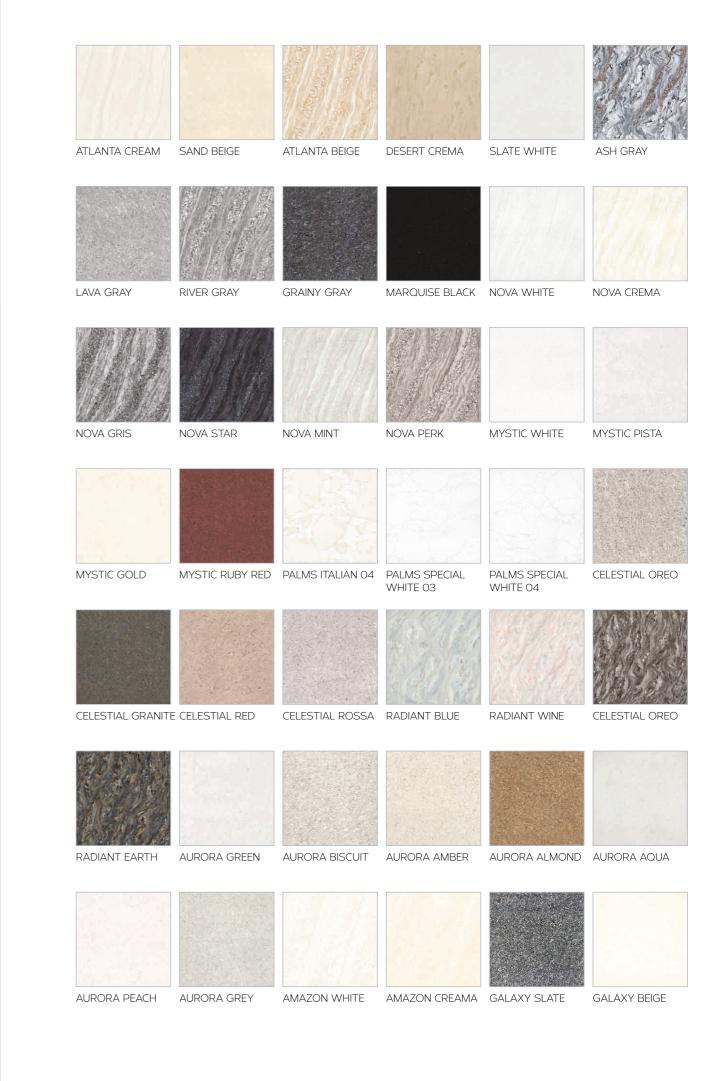



A design that brightens the interior world with pattern and elegance. Blending traditional craftsmanship with the latest technology.

www.lntsufin.com

FEATURES






























ATLANTA CREAM

SAND BEIGE







ATLANTA BEIGE

DESERT CREMA



SLATE WHITE

















RIVER GRAY



GRAINY GRAY



MARQUISE BLACK



600X**600**MM







NOVA WHITE

NOVA CREMA







NOVA GRIS

NOVA MINT

NOVA PERK















MYSTIC WHITE

MYSTIC GOLD







MYSTIC RUBY RED



101 | 102

www.lntsufin.com



600×**600**MM





PALMS ITALIAN 04





PALMS SPECIAL WHITE 03



PALMS SPECIAL WHITE 04


















CELESTIAL GRANITE



CELESTIAL RED



CELESTIAL ROSSA





600X**600**MM





RADIANT BLUE



RADIANT WINE






RADIANT BROWN



RADIANT EARTH

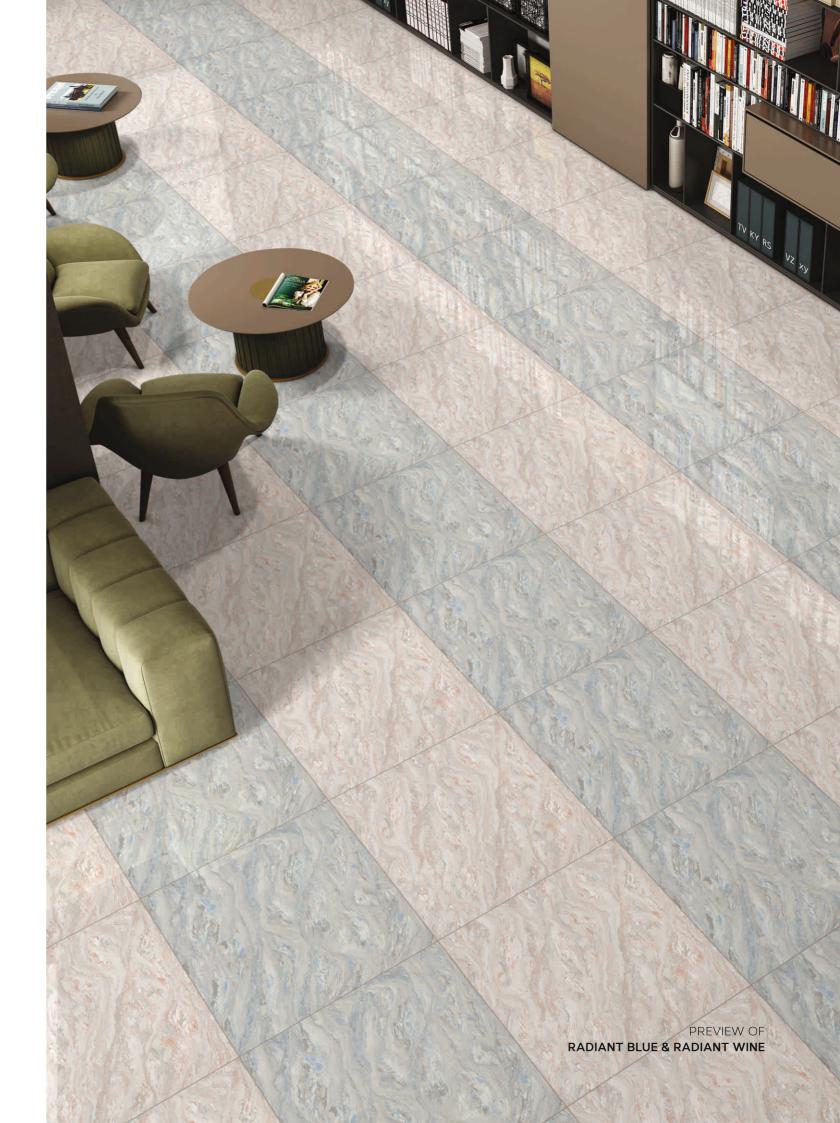











AURORA GREEN



AURORA BISCUIT



AURORA AMBER



AURORA ALMOND



AURORA AQUA













AURORA PEACH

AURORA GREY








| Sr. No. | CHARACTERISTICS | STANDARD AS PER IS 15622:2006 GROUP BIA | OUR VALUE | TEST METHOD |
|-----------|--|--|--------------------------|----------------|
| 1 | Deviation in length & width | ± 0.5% | ± 0.1% | ISO-10545-2 |
| 2 | Deviation in thickness | ± 5.0% | ± 2.0% | ISO-10545-2 |
| 3 | Straightness of sides | ± 0.5% | ± 0.1% | ISO-10545-2 |
| 4 | Rectangularity | ± 0.5% | ± 0.1% | ISO-10545-2 |
| 5 | Surface flatness | ± 0.5% | ± 0.2% | ISO-10545-2 |
| 6 | Colour difference | Unaltered | No Change | ISO-10545-16 |
| 7 | Glossiness | As per manufacturer | Min 70% | Glossometer |
| Structura | al properties | | | |
| 1 | Water Absorption | > 0.5% | > 0.05 % | ISO-10545-3 |
| 2 | Apparent density | < 2.0 gm/cc | < 2.28 gm/cc | DIN 51082 |
| Massive | mechanical properties | <u> </u> | | |
| 1 | Flexural modulus or rupture | Min 35 N/mm ² | Min 40 N/mm ² | ISO-10545-4 |
| 2 | Flexural breaking strength | Min 1300 N | Min.2000 N | ISO-10545-4 |
| 3 | Impact resistance | As per manufacturer | Min. 0.55 | ISO-10545-5 |
| Surface | mechanical properties | · | | |
| 1 | Deep abrasion resistance | Max 175mm ³ | Max 132mm ³ | ISO-10545-6 |
| 2 | Moh's hardness | Min 6 | 8 ⁺ | EN 101 |
| Thermol | nydrometric properties | · | | |
| 1 | Frost resistance | No Damage | Frost proof | ISO-10545-12 |
| 2 | Thermal shock resistance | No Damage | No Damage | ISO-10545-9 |
| 3 | Moisture expansion | Nil | Nil | ISO-10545-10 |
| 4 | Thermal Expansion | Max 9.0x10 ⁻⁶ | Max 6.5x10 ⁻⁶ | ISO-10545-8 |
| Chemica | l properties | | | |
| 1 | Chemical resistance | No Damage | No Damage | ISO-10545-13 |
| 2 | Satin resistance | Resistance | Resistance | ISO-10545-14 |
| Safety p | roperties | | | |
| 1 | Slip resistance (friction co efficent) | < 0.40 | < 0.40 | ISO-10545-17 |

| PACKING DETAILS | | | | | |
|------------------|------------|-----------|-------------------|--------------|--|
| Dimensions (mm) | Thickness | Tiles/Box | Coverage Area/Box | Weight | |
| 600x600mm | 8mm Approx | 4 pcs. | 15.5 sq. ft | 25 kg Approx | |

Note: Certain amount of size and shade variation is inherent in all ceramic products. Our conformity to the above fast is applicable only for quality. Colour shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However the company reserve the right to change the specification without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. It is suggest to check the tiles before purchase any laying as the company does not accect responsibility once the tiles are laid.

These tiles significantly contribute to the greater aesthetic of this classically styled space, breathe new life into an art form in your spaces.

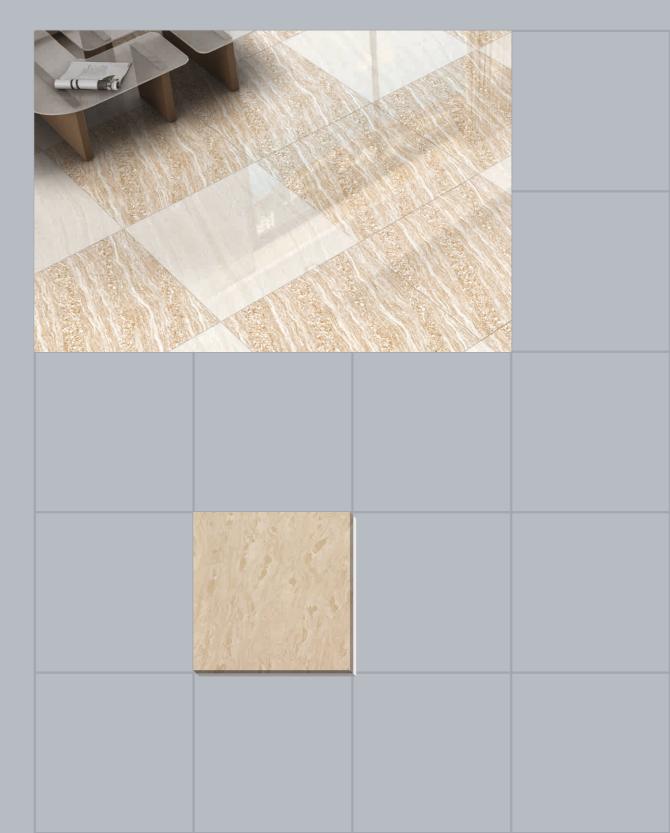














ACOSTIC WHITE

ACOSTIC CREAMA







NEBULA BEIGE






DOUBLE CHARGE VITRIFIED TILES TECHNICAL SPECIFICATIONS

| | DOUBLE CHARGE VITRIFIED TILES TECHNICAL SPECIFICATIONS | | | | | |
|----|--|---|--------------------------|-------------------|--|--|
| NO | TECHNICAL DETAILS | INTERNATIONAL STD. ISO 13006/EN 176. B1A | OUR VALUE | METHOD OF TESTING | | |
| 1 | Deviation In Length & Width | ±0.6% | ±0.1% | ISO 10545-2 | | |
| 2 | Deviation In Thickness | ±5% | ±2% | ISO 10545-2 | | |
| 3 | Straightness Of Sides | ±0.5% | ±0.1% | ISO 10545-2 | | |
| 4 | Rectangularity | ±0.6% | ±0.1% | ISO 10545-2 | | |
| 5 | Surface Flatness | ±0.5% | ±0.1% | ISO 10545-2 | | |
| 6 | Hardness On Mohs Scale | >6 | >6 | EN 101 | | |
| 7 | Water Absorption | < 0.5% | <0.05% | ISO 10545-3 | | |
| 8 | Flexural Strength(Mor) | > 35 N/mm² | > 40 N/mm² | ISO 10545-4 | | |
| 9 | Abrasion Resistance | < 175 mm³ | <145 mm³ | ISO 10545-6 | | |
| 10 | Skid Resistance | > 0.4 | > 0.6 | ISO 10545-17 | | |
| 11 | Bulk Density | >2 | > 2.2 | DIN 51082 | | |
| 12 | Frost Resistance | Frost Proof | Frost Proof | ISO 10545-12 | | |
| 13 | Chemical Resistance | No Damage | No Damage | ISO 10545-13 | | |
| 14 | Thermal Shock | No Damage | No Damage | ISO 10545-9 | | |
| 15 | Thermal Expansion | < 9 X 10 ⁽⁻⁶⁾ | < 6 X 10 ⁽⁻⁶⁾ | ISO 10545-8 | | |
| 16 | Stain Resistance | Resistant | Resistant | ISO 10545-14 | | |
| 17 | Moisture Expansion | Nil | Nil | ISO 10545-10 | | |
| 18 | Glossiness | Gloss Meter | Min 90% Reflection | ISO 10545-2 | | |
| 19 | Breaking Strength | 1113 N | 2800 N | ISO 10545-4 | | |

| PACKING DETAILS | | | | | |
|------------------|------------|-----------|-------------------|--------------|--|
| Dimensions (mm) | Thickness | Tiles/Box | Coverage Area/Box | Weight | |
| 600x600mm | 8mm Approx | 4 pcs. | 15.5 sq. ft | 25 kg Approx | |

Note: Certain amount of size and shade variation is inherent in all ceramic products. Our conformity to the above fast is applicable only for quality. Colour shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However the company reserve the right to change the specification without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. It is suggest to check the tiles before purchase any laying as the company does not accect responsibility once the tiles are laid.

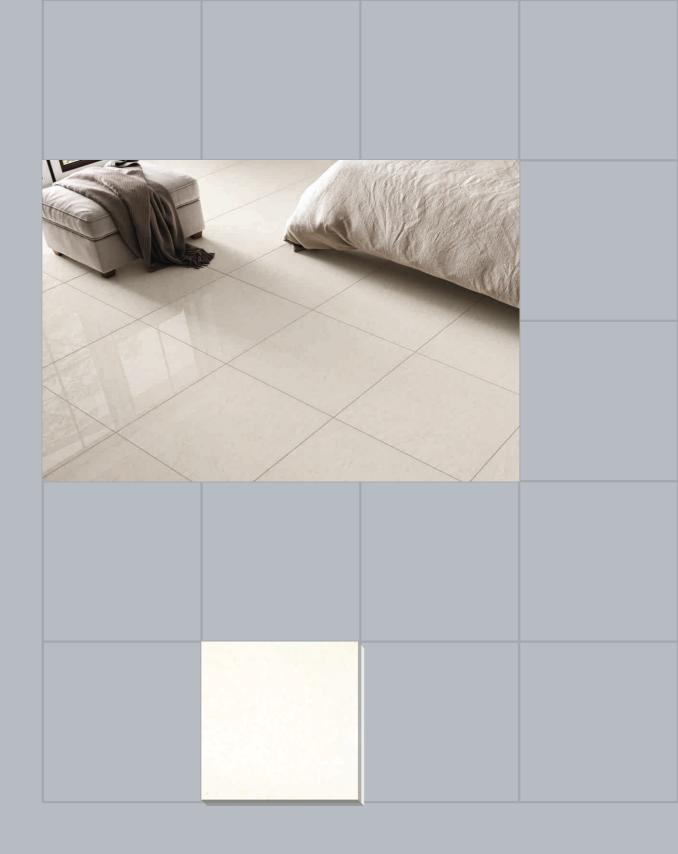

If you're looking for a natural look tile, then the 800x800mm tiles are an ideal option with an awesome tile patterns that gives your space a classic and timeless look.